

ELECTRICAL SAFETY  
POWER QUALITY  
ENERGY MANAGEMENT



## Split-Core Current Transformer EGSCCT-Series

- Easy and Quick Commissioning
- Highly Suitable For Retrofit Applications
- Complies to IEC60044-1, EN60044-1, VDE0414-44-1, GB1208-2006

# Split-Core Current Transformer EG SCT-Series



## Product Description

The compact split-core current transformers (EGSCT) are highly suitable for applications where a disconnection of power cables is either difficult or not possible. This makes the EGSCT a perfect solution for retrofitting of existing electrical systems.

The high accuracy allows exact current measurements for various applications like datacenters, commercial buildings, or production plants. All transformers are supplied with color-coded wires to reduce common mistakes during the installation. Two UV-resistant wire ties are also included for easy mounting.

## Device Features

- Up to 3000A
- Accuracy class 0.5
- Operating Temperature: -15°C bis 60°C
- Size ranges from Ø 10mm up to Ø 76.2mm
- Rapid mounting - without disconnecting the power cables

## Typical Applications

- Current measurement, monitoring for protection of wires and equipment
- Current and power measurement for electric motors, lighting, air compressor, heating and ventilation system, air-condition equipment and automation - control system
- Sensor for current, power and energy monitoring devices

# Technical Specification & Ordering Code

## EGSCT-1A/5A Split Core Current Transformer

Specification	
Frequency	50-60Hz
Rated Current	100A to 600A loads
Rated Output	1A / 5A (AC)
Accuracy	Class 0.5 from 20% to 120% of rated current
Phase angle	Less than 2 degrees at 50% of rated current
Insulation voltage	600Vac
Maximum primary voltage	5000Vac
Dielectric strength	2.5KV/1mA/1min
Operating temperature	-15°C to 60°C
Operating humidity	<85%
Case material	PC/UL94-V0
Bobbin	PBT
Core	Permalloy
Internal structure	Epoxy

## EGSCT-333mV Split Core Current Transformer

Specification	
Frequency	50-60Hz
Rated Current	5A to 600A loads
Rated Output	333mV/100mV (AC) Class 0.5 from 20% to 120% of rated current
Accuracy	Class 0.5 from 20% to 120% of rated current
Phase angle	Less than 2 degrees at 50% of rated current
Insulation voltage	600Vac
Maximum primary voltage	5000Vac
Dielectric strength	2.5KV/1mA/1min
Operating temperature	-15°C to 60°C
Operating humidity	<85%
Case material	PC/UL94-V0
Bobbin	PBT
Core	Permalloy
Internal structure	Epoxy
Leads	UL1015, Twisted Pair, 22AWG

## EGSCT Models



Model	Primary Current Rating	Secondary Current Rating
E-10	5 / 10 / 20 / 50 / 75	333mV, 100mV
E-16 / E-RJ16 (GMPM)	5 / 10 / 50 / 100 / 150	333mV, 100mV
E-24 / E-RJ24 (GMPM)	10 / 50 / 100 / 250 / 300	1A or 5A (only for >200A), 333mV, 100mV
E-36 / E-RJ36 (GMPM)	20 / 100 / 250 / 400 / 600	1A or 5A (only for >200A), 333mV, 100mV
E-U125	50 / 100 / 125 / 250 / 400 / 630	333mV, 100mV
E-U200	100 / 125 / 250 / 400 / 630 / 800 / 1000 / 2000	333mV, 100mV
E-U300	400 / 800 / 1500 / 2500 / 3000	333mV, 100mV
E-B23	100 / 150 / 200 / 250 / 300 / 400	1A, 5A
E-B58	250 / 300 / 400 / 500 / 600 / 750 / 800	1A, 5A
E-B812	500 / 600 / 750 / 800 / 1000 / 1200 / 1500	1A, 5A
E-B816	1000 / 1500 / 2000 / 2500 / 3k / 4k / 5k / 6k	1A, 5A
E-RC060 / RC076 / RC100 / RC150 / RC160 / RC190 / RC200 / RC300	1k / 2k / 3k / 4k / 5k / 6k and above	85mV / per 1000A @ 50Hz without integrator 100mV / per 1000A @ 50Hz without integrator

\*\* Remark: EGSCT-RCxxx, xxx refer to window size of Rogowski coil, integrator required for each RCCT with art no: EGSCT-RCS-Sg.



## Ordering Code

X	Model
-	
X	Primary Current rating
/	
X	Secondary current rating / 1A, 5A, 333mV
-	
X	Cable length (10m max), Not applicable for E-B23, E-B58, E-B812, E-B816



# Dimensions





E-B23





E-B58





E-B88





E-B812



E-B816





E-10





E-16

\* E-RJ16 (For GMPM)





E-24

\* E-RJ24 (For GMPM)





E-36



\* E-RJ36 (For GMPM)




E-U125



E-U200



E-U300

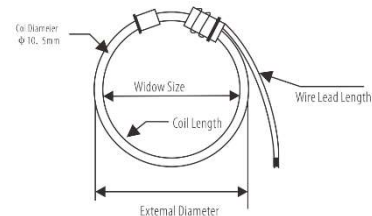

## Eetarp Engineering Pte Ltd

11 Woodlands Close, #08-13 | Woodlands 11  
Singapore 737853  
Tel: +65 6339 3651 | Fax: +65 6339 3667  
Email: [contact@eetarp.com](mailto:contact@eetarp.com)  
CRN: 200001617K

## Eetarp Power (M) Sdn Bhd

A-5-11, Blk Allamanda  
10 Boulevard, Lebuhraya Sprint  
PJU 6A 47400, PJ | Selangor, Malaysia  
Tel: +603 7729 3973 | Fax: +603 7729 8973  
E-Mail: [contact@eetarp.com](mailto:contact@eetarp.com)  
CRN: 1205228P

## Eetarp Partners

Australia | China | India | Indonesia | Japan | Philippines | South Korea | Taiwan | Thailand | Vietnam

[www.eetarp.com](http://www.eetarp.com)