

ELECTRICAL SAFETY
POWER QUALITY
ENERGY MANAGEMENT



Graphene Power Quality Meter GPM96

- Power Quality Measurement
- Comply with IEC62053 class 0.2S
- Measurement sampling rate of 8kHz
- Event waveform recording (8MB memory)

Graphene Power Quality Meter

GPQM96 – Designed for Intelligence



Product Description

The digital universal measuring device GPQM96 is suited for measuring and displaying electrical quantities of electricity networks.

The range of measurements extends from voltages and currents to power and energy meters to measured quantities of the voltage quality, such as THD and the individual harmonics up to the 63rd order. The accuracy of active energy measurements corresponds to class 0.2S in accordance with DIN EN 62053-22.

The GPQM96 is suitable for use in 2-, 3- and 4-wire systems and in their respective versions as TN, TT and IT systems. This allows monitoring single and polyphase systems. With its standardized dimensions of 96 x 96 mm, the device is intended for front panel mounting.

Device Features

- Accuracy class according to IEC 62053-22: 0.2 S
- High Resolution Failure Record with 4kHz
- Colorful LCD interface
- Support voltage sag, swell and SOE events recording
- Full Real-time Data Measurement
- 3 current and 3 voltage inputs
- 8MB internal memory
- 2 digital input / 2 relay output (optional module for additional DI/DO/AI/AO)
- Supports Modbus RTU
- Modbus TCP / Bacnet

Typical Applications

- Continuous monitoring of the power quality
- Collection of relevant data for energy management systems
- High-resolution waveform recording allows analysis of power quality phenomena

Technical Specification

Power Supply	
Rated Voltage	AC/DC 80~270V
Power Consumption	≤10VA
Withstand voltage	≥2kV

Communication / Interface	
RS-485: Modbus-RTU (Default)	
Physical interface	RS-485
Communication speed	Up to 115.2 kbps
Communication protocol	Modbus-RTU

Relay output	
Capacity	5A/250 VAC; 5A/30 VDC
Isolation voltage	Isolation 2000 VAC

Energy pulse output	
Pulse width	80ms±20%

Digital input	
Sensitivity	AC220 Input
Isolation voltage	2000 VAC

Measuring circuit

Measuring voltage inputs	
Rated range	400 VAC L-N (690 VAC L-L)
Resolution	0.1 V
Impedance	> 1 MΩ
Power consumption	1.2VIn
Over voltage	Instantaneous : 2 times/10s
Frequency	45-65 Hz

Measuring current inputs	
Rated range	5A/1A, (continuous: 1.2In)
Resolution	1 mA
Impedance	≤20mΩ/per phase
Power consumption	≤0.1 VA/per phase
Over current	Instantaneous : 10 times/5s

Working Environment

Working temperature	-10°C to 60°C
Storage temperature	25°C to 70°C
Relative humidity	5 ~ 95% RH, no condensation
Protection degree	Front case IP65, rear case IP20

Other

Electrostatic discharge immunity	IEC 61000-4-2-III
Radiated, radio-frequency, electromagnetic field immunity	IEC 61000-4-3-III
Electrical fast transient/burst immunity	IEC 61000-4-4-IV
Surge immunity	IEC 61000-4-5-IV
Immunity to conducted disturbances, induced by radio-frequency fields	IEC 61000-4-6-III
Power frequency magnetic field immunity	IEC 61000-4-8-III
Voltage dips, short interruptions and voltage variations immunity	IEC 61000-4-11-III

Measurement Parameters

Power Quality Analysis	
Wave Sampling	4kHz
Harmonic	2~63rd Harmonic,
Voltage Sag/Swell	Waveform record
Unbalance	Voltage-, current- and zero sequence
Voltage/Freq. Deviation	Setpoint alarm and record
Rapid Voltage Alteration	Trigger DO point, waveform record
Real-time Data	Voltage, Current, Active power, Reactive power, Apparent Power, Power Factor, Frequency
Measurement Channel	3 channels for each: Voltage / Current
Real-time Data	Voltage, Current, Active power, Reactive power, Apparent Power, Power Factor, Frequency

Energy

Energy	Positive / Negative active, reactive, apparent energy; Positive / Negative base wave active, reactive energy
History Energy	Storage to build in memory
Multi-tariff energy	2 tariff, 6 time period, 2 time zone

Demand

Real-time Demand	fixed- and slide window record value
------------------	--------------------------------------

Data and Event Record

Memory	8MB
Max. / Min Record	min/max voltage L-N, voltage L-L, current, frequency, power, energy
SOE Record	Yes
PQ Record	Yes


Accuracy

Voltage/ Current	±0.2%
Re-, Active/Apparent power	±0.2%
Active Energy	Class 0.2s
Reactive Energy	Class 2
Power Factor	0.20%
Frequency	±0.01Hz

Dimensions & Ordering Code


Ordering Code for GPQM96

GPQM96		Fixed Eetarp Product Code - Base Unit
X		Reserved
X		Reserved
X		Reserved
X		Reserved
C		Modbus RS485
X	Module 1	1 = 4 digital inputs 2 = 2 relay outputs 3 = 2 analog inputs : mA
X	Module 2	4 = 2 analog outputs : mA 5 = Com module - RJ45, Modbus/TCP 6 = Com module - DB9, Profibus-DP
X	Module 3	7 = Com module - additional RS485, Modbus-RTU 8 = Com module - BACnet/MSTP communication 9 = Com module - BACnet/IP communication x = No extended module
X	Module 4	Remark: Max 4 extended module Only 1 additional Com module can be add-on

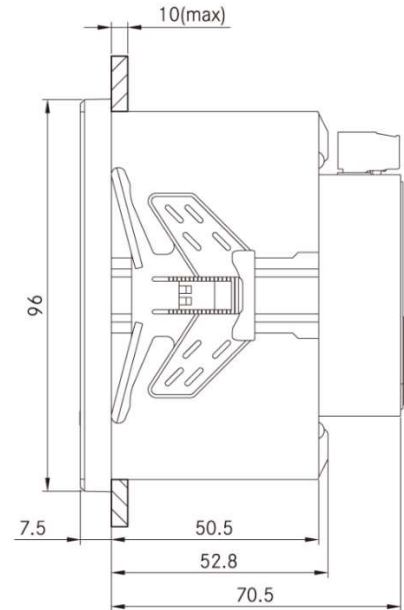

Common GPQM96 Variants

Order Number	Type	Features
GPQM96XXXXCXXXX	GPQM96	GPQM96 + 8MB memory + 2DI/2DO (Basic model)
GPQM96XXXXC5XXX	GPQM96	Basic model + Modbus TCP/IP
GPQM96XXXXC51XX	GPQM96	Basic model + Modbus TCP/IP + 4 DI

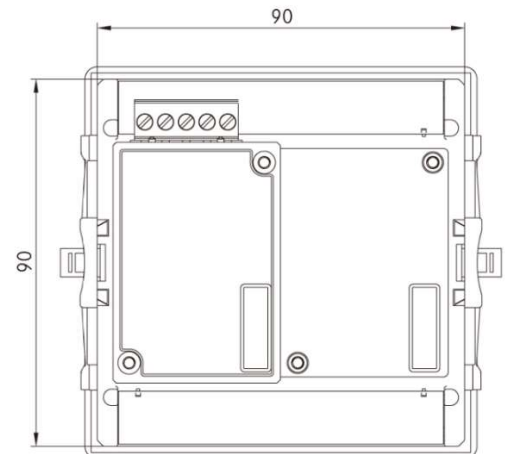

Eetarp Engineering Pte Ltd

11 Woodlands Close, #08-13 | Woodlands 11
Singapore 737853
Tel: +65 6339 3651 | Fax: +65 6339 3667
Email: contact@eetarp.com
CRN: 200001617K

Eetarp Power (M) Sdn Bhd

A-5-11, Blk Allamanda
10 Boulevard, Lebuhraya Sprint
PJU 6A 47400, PJ | Selangor, Malaysia
Tel: +603 7729 3973 | Fax: +603 7729 8973
E-Mail: contact@eetarp.com
CRN: 1205228 P